ELTSK-5



## SPECIFICATIONS

RATING: 50mA, 12VDC
ELECTRICAL LIFE: 30,000~50,000 cycles
CONTACT RESISTANCE: 500mΩ max
INSULATION RESISTANCE: 100MΩ min. 100VDC
DIELECTRIC STRENGTH: 250VAC/1 min
OPERATION FORCE: 260 ± 70g
160 ± 50g
STORAGE TEMPERATURE: -30°C to +80°C
CONTACT ARRANGEMENT: 1 pole 1 throw

## DIMENSION




Circuit Diagram

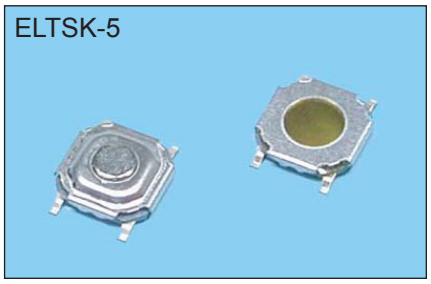


P.C.B Layout

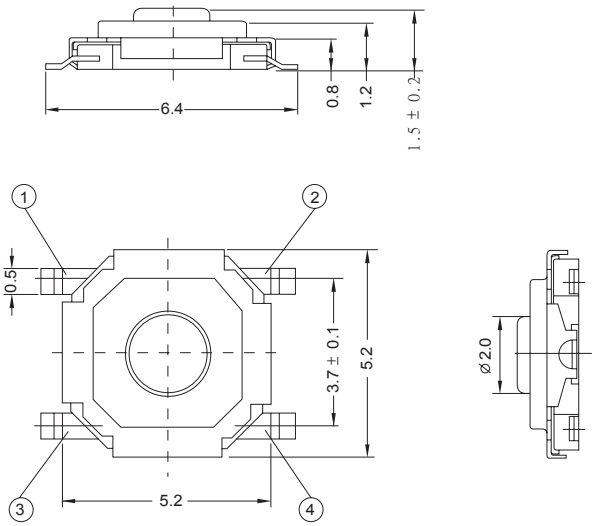


## HOW TO ORDER

ELTSK — 5 □ □ — □ — □

Slim type

Prod Size: 5.2 x 5.2

Dimension H:

| Code | ELTSK-5 |
|---|---|
| 1 | 0.8 |
| 2 | 1.5 |

Operation Force:
N = 160g
R = 260g

Package Style:
T/R: Tape & Reel

RoHS code
H= RoHS Compliant